

VENTILADORES FRIGORÍFICOS


Série VMF

CARACTERÍSTICAS:

- Ventiladores com motor, grelha de proteção e hélice.

DIMENSÕES:

Ventilador	A	B	C	D	E
Ø250 mm	55	92	250	275	320
Ø300 mm	80	92	300	320	360
Ø350 mm	90	102	350	370	422
Ø400 mm	90	102	400	420	470
Ø450 mm	90	102	450	470	522
Ø500 mm	90	137	500	520	570
Ø550 mm	100	137	550	570	622
Ø600 mm	100	137	600	620	679
Ø630 mm	100	137	630	650	740

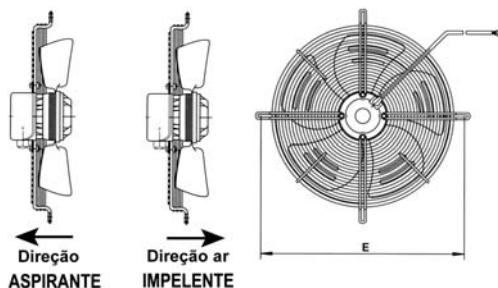

DADOS TÉCNICOS:

Código	Modelo	Ø hélice (mm)	Caudal de ar (m³/h)	Consumo nominal		Velocidade R.p.m.	Nível sonoro (dBA)
				(W)	(A)		
ASPIRANTES MONOFÁSICOS 230V - 50Hz							
WE 04 494	VMF-250A/2M	250	1800	100	0,55	2500	60
WE 04 480	VMF-250A/4M	250	1460	70	0,3	1400	55
WE 04 495	VMF-300A/2M	300	2800	140	0,65	2530	60
WE 04 473	VMF-300A/4M	300	1743	80	0,4	1386	58
WE 04 474	VMF-350A/4M	350	2980	150	0,7	1380	62
WE 04 484	VMF-400A/4M	400	4400	180	0,8	1380	68
WE 04 475	VMF-450A/4M	450	5507	250	1,2	1350	68
WE 04 476	VMF-500A/4M	500	6046	420	1,85	1300	72
WE 04 487	VMF-550A/4M	550	8268	500	2,4	1300	75
WE 04 488	VMF-600A/6M	600	9400	650	2,4	900	72
WE 04 489	VMF-630A/6M	630	9500	560	2,5	900	75
ASPIRANTES TRIFÁSICOS 400V - 50Hz							
WE 04 485	VMF-350A/4T	350	3170	150	0,4	1380	62
WE 04 486	VMF-400A/4T	400	4500	180	0,5	1380	68
WE 04 481	VMF-450A/4T	450	5600	250	0,6	1360	68
WE 04 482	VMF-500A/4T	500	6246	450	0,9	1300	72
WE 04 490	VMF-600A/6T	600	9400	830	1,5	900	72
WE 04 491	VMF-630A/6T	630	9500	560	1,6	900	72
IMPELENTE MONOFÁSICOS 230V - 50Hz							
WE 04 478	VMF-250I/4M	250	1460	70	0,3	1400	55
WE 04 479	VMF-300I/4M	300	1743	80	0,4	1386	58
WE 04 483	VMF-350I/4M	350	2980	150	0,7	1380	2
WE 04 492	VMF-400I/4M	400	4400	180	0,8	1380	68
WE 04 496	VMF-450I/4M	450	5507	250	1,2	1350	68
WE 04 497	VMF-500I/4M	500	6046	420	1,85	1300	72
WE 04 498	VMF-550I/4M	550	8268	500	2,4	1300	75
WE 04 499	VMF-600I/4M	600	9400	650	2,4	900	72



MOTORES DE ROTOR EXTERNO

CURVAS DE RENDIMENTO:

