


THERMOSTAT:K Series K50 MODEL

Take our thermostat, take your temperature

Product Image

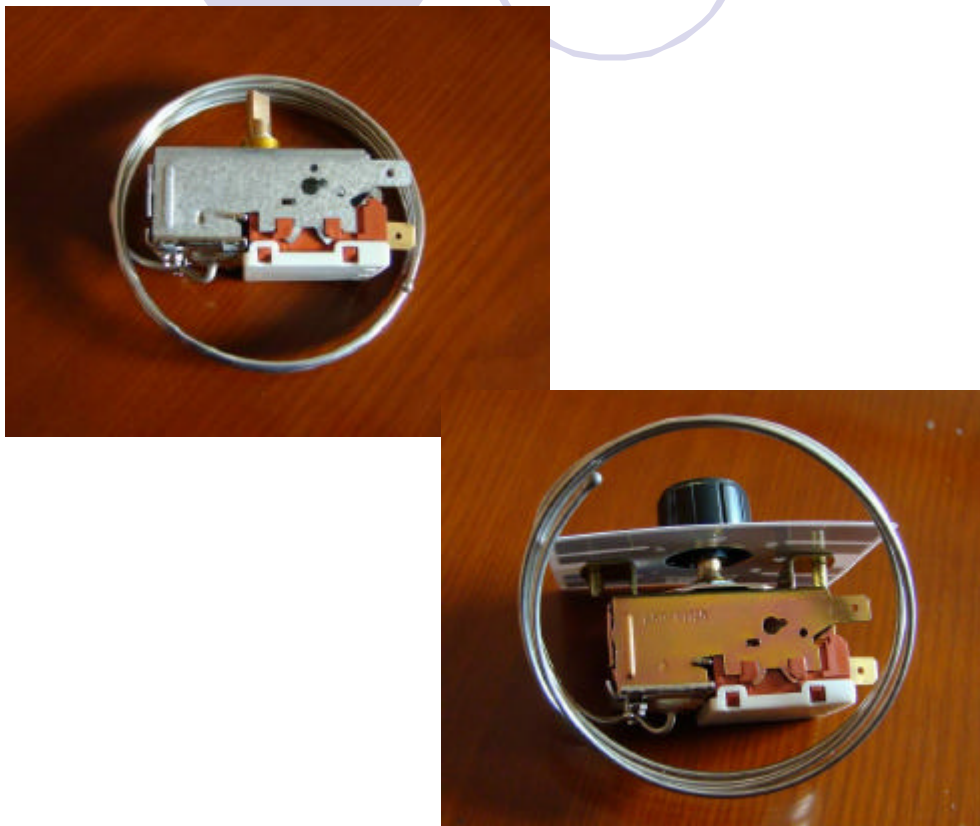

Usage: use in single door refrigerator, ice tank, show case, wine storage , water fountain, vehicle air-conditioner etc.

Control temp. range:-35 ~ +15

Rating voltage:AC220V/AC110V, DC 8V, 12V,24V in vehicle air-conditioner.

Rating current:5A,8A in vehicle air-conditioner.

MAX use environment temp.:70

Characteristic: precise, control range wide, high reliability, extensive usage. also can select the function of manual force-off and force-on.




Typical Model	Temperature Characteristic()						Sensor Length(MM)	Installation Model
	COLD		NORMAL		WARM			
	ON	OFF	ON	OFF	ON	OFF		
K50-P1125	-9.5 ± 1.5	-18 ± 1.5			8.5 ± 1.5		1200 ± 50	NUT/SCREW FIXED
K50-P1126	-18 ± 1.5	-24.5 ± 1.5			-9.5 ± 2		1200 ± 50	NUT/SCREW FIXED
K50-P1110	-14.5 ± 1.5	-23 ± 1.5			2 ± 1.5		1200 ± 50	NUT/SCREW FIXED
K50-P1127	5 ± 1.5	1.5 ± 1.5			12.5 ± 1.5		1200 ± 50	NUT/SCREW FIXED

The above data are some of our typical models for your information, and we also can customize different specifications as requested.

THERMOSTAT:K SERIES K59 MODEL

Take our thermostat, take your temperature

Product Image

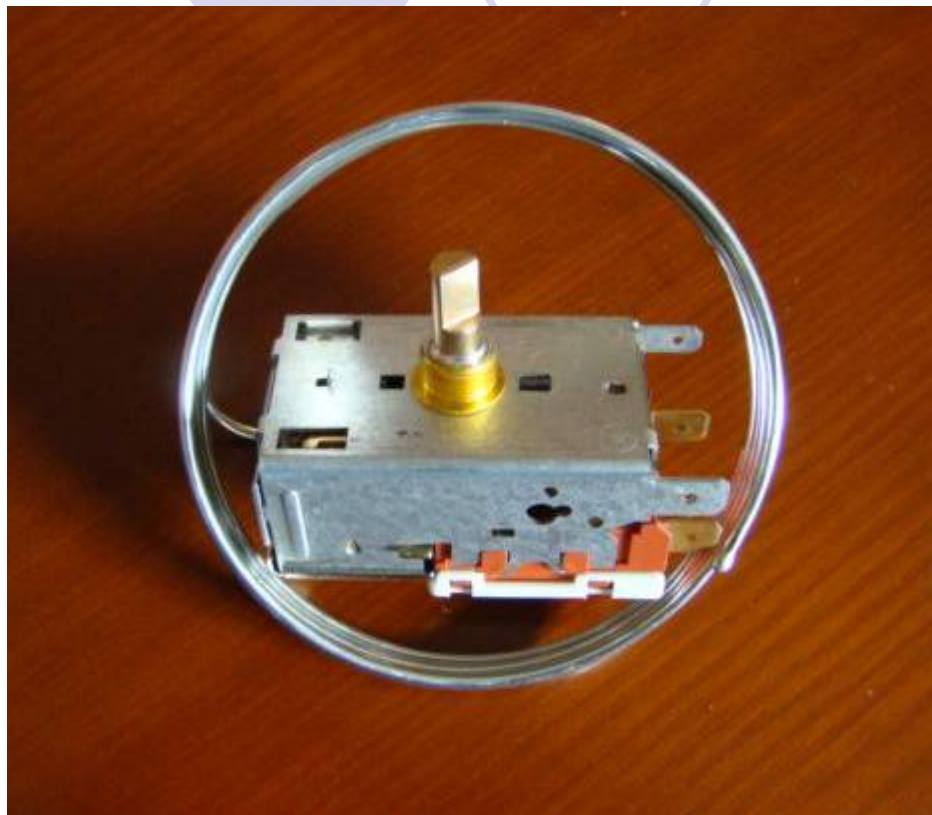

Usage: use in double door refrigerator and multiple door refrigerator
 Control temp. range:-30 ~ +10
 Rating voltage:AC220V/AC110V,
 Rating current:5A,
 MAX use environment temp.:70
 Characteristic: precise, high reliability, extensive usage, switch on at invariable temp. also can select the function of manual force-off and force-on.

Copyright
 Eric-zhang
 Reserved


Typical Model	Temperature Characteristic()						Sensor Length(MM)	Installation Model
	COLD		NORMAL		WARM			
	ON	OFF	ON	OFF	ON	OFF		
K59-L1102	3.5 ± 2	-22 ± 2			3.5 ± 1.5	-12 ± 1.5	1200 ± 50	NUT/SCREW FIXED
K59-L1252	4 ± 1.5	-21 ± 1.5			4 ± 2	-14.6 ± 2	1150 ± 50	NUT/SCREW FIXED
K59-L1740	3.5 ± 1.5	-26 ± 1.5			3.5 ± 2	-11 ± 2	1200 ± 50	NUT/SCREW FIXED
K59-L4881	3 ± 2	-23 ± 2			3 ± 1.5	-12 ± 1.5	1200 ± 50	NUT/SCREW FIXED

The above data are some of our typical models for your information, and we also can customize different specifications as requested.

THERMOSTAT:K Series K54 MODEL

Take our thermostat, take your temperature

Product Image

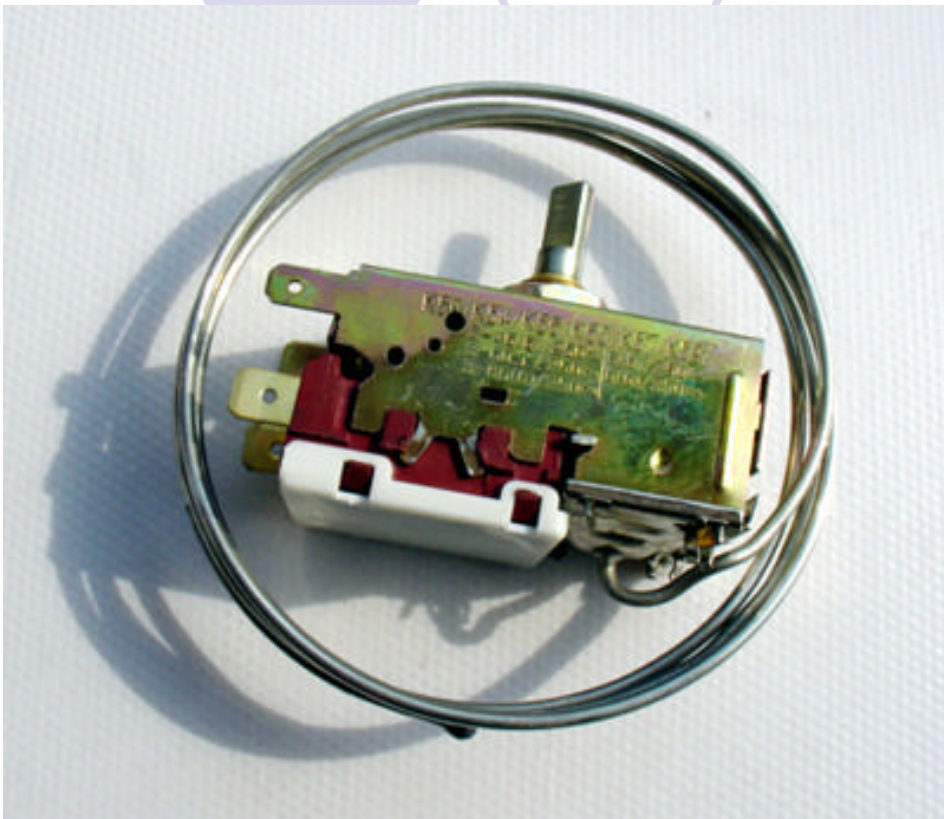

Usage: use in show case of supermarket,
large show case ,large ice tank
Control temp. range:-30 ~ +10
Rating voltage:AC220V/AC110V,
Rating current:5A,
MAX use environment temp.:70
Characteristic: precise, high reliability,
extensive usage, alarm exceeding set temp.

Copyright
Eric-zhang
Reserved


Typical Model	Temperature Characteristic()				Signal	Sensor Length(MM)	Installation Model
	COLD		WARM				
	ON	OFF	ON	OFF			
WPF20A-K		-20 ± 2	-1 ± 1.5	-7 ± 1.5	6 ± 2	1000 ± 50	NUT/SCREW FIXED
K54-P1102		-26 ± 2	-11.5 ± 1.5	-16 ± 1.5	5 ± 2	2000 ± 50	NUT/SCREW FIXED
K54-L1879	-20 ± 1.5	-28 ± 1.5	-13.5 ± 2		5 ± 2	850 ± 30	NUT/SCREW FIXED
K54-H1119		-34 ± 2	-15 ± 1.5	-22 ± 1.5	5 ± 2	2500 ± 50	NUT/SCREW FIXED

The above data are some of our typical models for your information, and we also can customize different specifications as requested.

THERMOSTAT:K Series K60 MODEL

Take our thermostat, take your temperature

Product Image

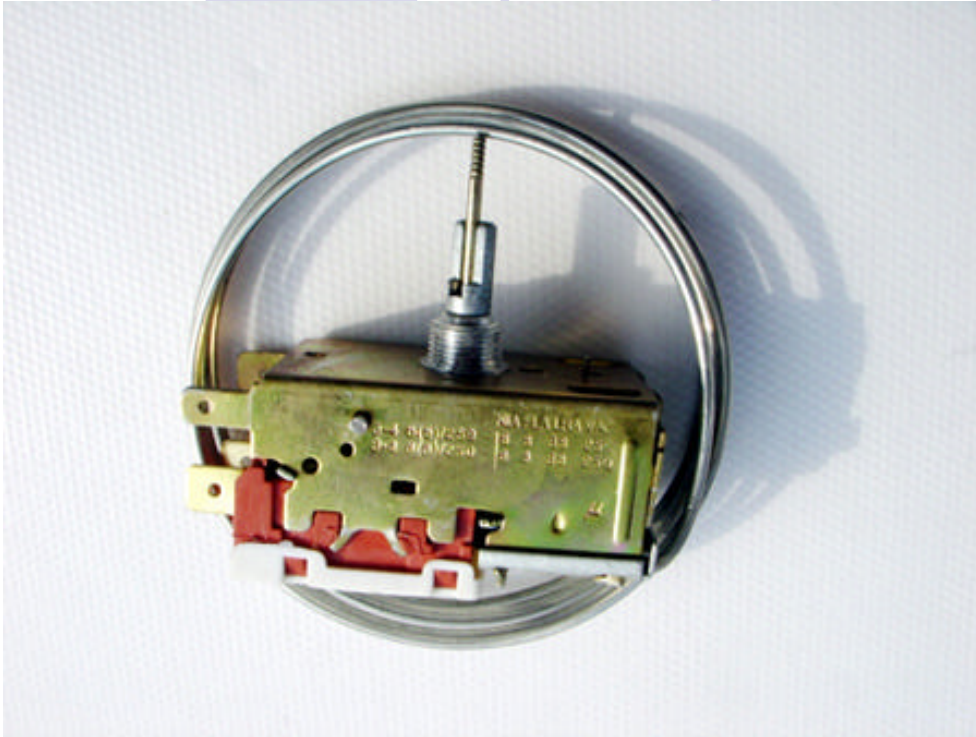

Usage: use in small refrigerator ,room refrigerator

Control temp. range:-30 ~ +10

Rating voltage:AC220V/AC110V,

Rating current:5A,

MAX use environment temp.:70

Characteristic: precise, high reliability, extensive usage, semiautomatic defrosting. also can select the function of manual force -off and force-on.

Copyright
Eric-zhang
Reserved

Typical Model	Temperature Characteristic()				Defrost	Sensor Length(MM)	Installation Model
	COLD		WARM				
	ON	OFF	ON	OFF			
K60-P1013		-27 ± 2	-4 ± 1.5	-11 ± 1.5	5 ± 2	1200 ± 50	NUT/SCREW FIXED
K60-P1135	-12 ± 1.5	-27.5 ± 1.5	-2.5 ± 1.5		4 ± 2	950 ± 50	NUT/SCREW FIXED

The above data are some of our typical models for your information, and we also can customize different specifications as requested.